


ESP32 Max7219 horloge

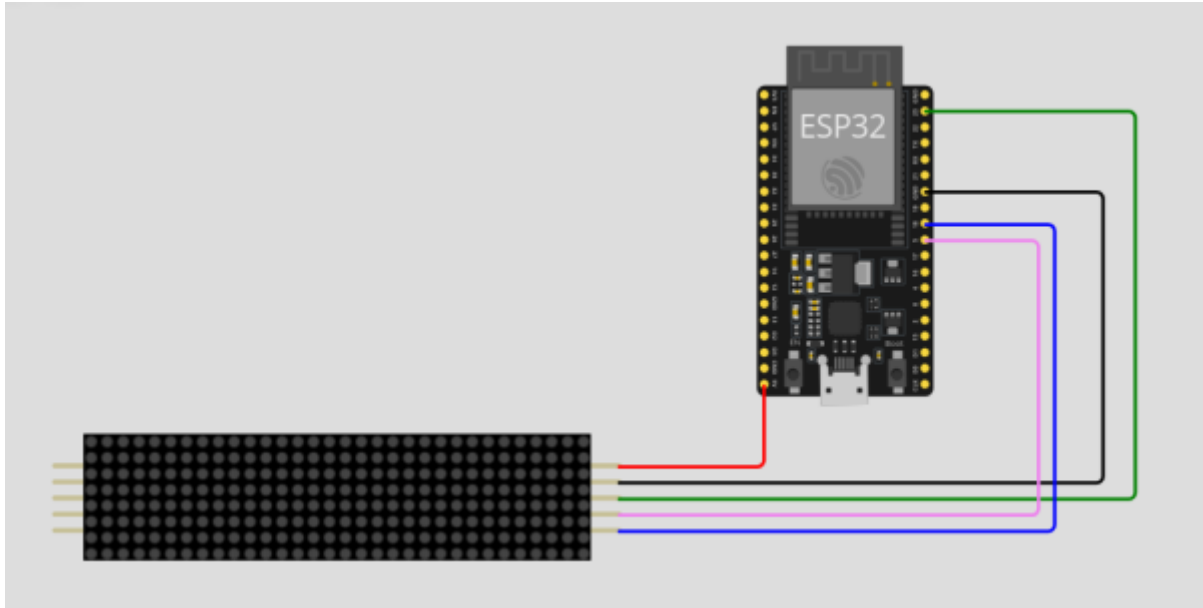

horloge001.ino

```
#include <WiFi.h>
#include <NTPClient.h>
#include <WiFiUdp.h>
#include <MD_Parola.h>
#include <MD_MAX72xx.h>
#include <SPI.h>

#define HARDWARE_TYPE MD_MAX72XX::FC16_HW
// #define HARDWARE_TYPE MD_MAX72XX::GENERIC_H

#define MAX_DEVICES 4
#define CLK_PIN 18
#define DATA_PIN 23
#define CS_PIN 5
MD_Parola Display = MD_Parola(HARDWARE_TYPE, DATA_PIN, CLK_PIN, CS_PIN,
MAX_DEVICES);

WiFiUDP ntpUDP;
NTPClient timeClient(ntpUDP);

const char* ssid = "-----"; // ssid et mdp à Valider
const char* password = "-----";

String Time, hour, minute;
String Formatted_date;
long currentMillis = 0;
long previousMillis = 0;
```

```
int interval = 1000;

void setup() {
  Serial.begin(115200);
  WiFi.begin(ssid, password);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print("Connecting.");
  }
  Serial.println("");
  Serial.println("WiFi connected.");

  timeClient.begin();
  timeClient.setTimeOffset(7200); // 7200 = 2*60*60 pour le decalage gmt
  de 2H en Ete ....

  Display.begin();
  Display.setIntensity(0);
  Display.displayClear();
}

void loop()
{
  obtainTime();
}

void obtainTime() {
  while(!timeClient.update()) {
    timeClient.forceUpdate();
  }

  currentMillis = millis();

  if (currentMillis - previousMillis > interval) {
    previousMillis = millis();

    Formatted_date = timeClient.getFormattedDate();
    Serial.println(Formatted_date);

    hour = Formatted_date.substring(11, 13);
    minute = Formatted_date.substring(14, 16);

    Time = hour + ":" + minute;
    Serial.println(Time);
    Display.setTextAlignment(PA_CENTER);
    Display.print(Time);
  }
}
```

```
}  
}
```

Librairies à installer dans l'IDE arduino

NTP client

ntpclient-master.zip

MD parola

“MD_Parola” à installer dans l'IDE arduino : Parola est un écran de texte de défilement modulaire utilisant les contrôleurs d'affichage à matrice LED MAX7219 ou MAX7221 à l'aide d'Arduino

md_parola-main.zip

Max7219

“MAX7219” à installer dans l'IDE arduino : [Max7219 sur Github EN](#)

max7219-1.0.0.zip

Fichier STL pour le boitier

case_max7219_v2_-_3201077.zip

low-cost-youtube-subscriber-display-sits-on-a-monitor-no-soldering-required20190523-29316-rqmtr0.zip

led-matrix-bar-weather-station-v120230509-86048-k1fv6d.zip

From:

<https://chanterie37.fr/fablab37110/> - Castel'Lab le Fablab MJC de Château-Renault

Permanent link:

<https://chanterie37.fr/fablab37110/doku.php?id=start:esp32:max7219:horloge&rev=1787157856>

Last update: **2026/08/19 18:44**

